

# Black Mini-ITX NAS Desktop/Wallmount chassis

The features of this new Mini-ITX chassis are compliant with 4G LTE or high speed WiFi networks and cloud transmission as well as NAS storage application for enterprises and Soho purpose. It can support maximum 8 x 2.5" hotswap drives or 3 x 3.5" hotswap drives, and additionally two more 2.5" internal HDD installable inside. This chassis mechanism uses very durable and high end SECC 1.0mm thickness, and the optional wall mount bracket can be installed in harsh industrial environment very well. This chassis also designed with quick assembly and screwless air dust-proof shield to keep away from the dust into the system. Cooling system also equipped with two silent 80mmx25mm fans as well as anti-vibration function. Also it supports dual slot expansion card such as high end graphic card with this chassis. Welcome distribution world wide.

## Specification


- \* Drive bay (1U FlexATX power installed mode): 2 x 5.25" ODD, 2 x 2.5" HDD bay
- \* Drive bay (PS2 power installed mode): 1 x 5.25" ODD, 2 x 2.5" HDD bay
- \* Equipped with two USB 2.0 ports at front bezel
- \* Screwless top cover design for quick system installation
- \* Screwless quick assembly fan with anti-vibration function
- \* Screwless dust-proof air filter shield for quick maintenance
- \* Side panel with dust-proof air filter design for dual slot high-end graphic card
- \* SECC 1.0mm high grade sheet metal as durable mechanism
- \* Equipped with two 80mmx25mm silent fans (fan part# D80SM-12C)
- \* Support Mini-ITX MB mounting at 6.7" x 6.7" (170mm x 170mm)
- \* Dual slot high-end graphic card compatible (max. card depth at 250mm)
- \* Standard paint: black
- \* Genesys Group branded server chassis model (with build-in fans) global 3 years warranty
- \* Chassis dimension: 370mm x 135mm x 264.50mm (W x H x D)
- \* Accessory Pack: M3 countersunk x8, M4 countersunk x4, M5 fan screw x8, M3 round head x12, #6 round head x8
- \* Package: NW 3.65KG, GW 4.65KG, 1.35 CUFT (45x37x23cm, one box packed)



PS2 power supply installed mode



1U FlexATX power supply installed mode

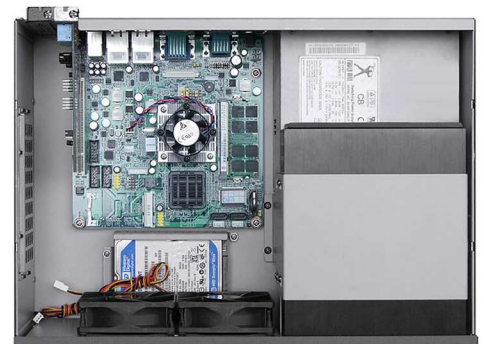

PS2 power supply installed mode



1U FlexATX power supply installed mode

## Ordering Information

- Model#: MINI-203B, Black Mini-ITX NAS Desktop/Wallmount chassis
- Option A: Mini-202B-WALL-BK-B, Black wall mount bracket (one pair as a unit, MINI-202B and MINI-203B both compatible)
  - Option B: D60SM-12C, 60mmx25mm cooling fan (one piece as a unit, can install 2pcs at rear panel)
  - Option C: PS2 power supply (max. psu depth at 140mm)
  - Option D-1: Mini-203B-PowerBK, Black PS2 to 1U Flex power supply bracket (please order if you install 1U FlexATX PSU)
  - Option D-2: EFAP-S250, 1U FlexATX 250W power supply with PFC (psu size 81.5 x 40.5 x 150mm)
  - Option D-3: ENP-7025B, 1U FlexATX 250W power supply with PFC (psu size 81.5 x 40.5 x 150mm)
  - Option E: 25-35-BK, 5.25" 3.5" 2.5" multiple HDD bracket
  - Option F-1: 2525TO3HDBK, 2x5.25" ODD space to 3x3.5" bracket (don't order if it's PS2 psu installed mode)
  - Option F-2: RW135-12G, 1x5.25" to 1x3.5" HotSwap Cage SATA/SAS 12G
  - Option F-3: RW135, 1x5.25" to 1x3.5" HotSwap Cage SATA/SAS 6G
  - Option F-4: TL135-12G, 1x5.25" ODD to 1x3.5" TrayLess HotSwap Cage SATA/SAS 12G
  - Option F-5: TL135, 1x5.25" ODD to 1x3.5" TrayLess HotSwap Cage SATA/SAS 6G
  - Option F-6: RW225-12G, 1x5.25" to 2x2.5" HotSwap Cage & 4xUSB 3.0 SATA/SAS 12G
  - Option F-7: RW625-12G, 1x5.25" to 6x2.5" HotSwap Cage SATA/SAS 12G
  - Option F-8: RW825-1525, 1x5.25" to 8x2.5" HotSwap Cage SATA/SAS 6G
  - Option F-9: RW425-12G-MS, 1x5.25" to 4x2.5" HotSwap Cage SFF-8643 12G
  - Option F-10: RW425-12G, 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 12G
  - Option F-11: RW425, 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 6G
  - Option F-12: RW825, 2x5.25" to 8x2.5" HotSwap Cage SATA/SAS 6G (don't order if it's PS2 psu installed mode)
  - Option F-13: RW335-12G, 2x5.25" to 3x3.5" HotSwap Cage SATA/SAS 12G (don't order if it's PS2 psu installed mode)
  - Option F-14: RW335, 2x5.25" to 3x3.5" HotSwap Cage SATA/SAS 6G (don't order if it's PS2 psu installed mode)
  - Option F-15: TL335-12G, 2x5.25" to 3x3.5" TrayLess HotSwap Cage SATA/SAS 12G (don't order if it's PS2 psu installed mode)
  - Option F-16: TL335, 2x5.25" to 3x3.5" TrayLess HotSwap Cage SATA/SAS 6G (don't order if it's PS2 psu installed mode)
  - Option G-1: 1MSAS-4SATA-500MM, SFF-8087 Mini-SAS (Host) to Four SATA (Device) cable
  - Option G-2: SFF-8643-500MM, SFF-8643 Mini-SAS HD (Host) to SFF-8643 Mini-SAS HD (Device) cable 12G
  - Option G-3: 4SATA-SFF-8643-500MM, Four SATA (Host) to SFF-8643 Mini-SAS HD (Device) cable 12G
  - Option H-1: 2U2011A-8080, 2U Intel LGA2011 active CPU cooler Square (2U 3U 4U chassis compatible)
  - Option H-2: 2U2011A-5694, 2U Intel LGA2011 active CPU cooler Narrow (2U 3U 4U chassis compatible)

Latest updated on October 26, 2018