



GPU and NAS Cloud Storage solution recommended. 一機多功能的架構, DeskTop桌上型, MiniTower直立式, 以及Wallmount壁掛式的環境皆適用。GPU運算用途方面最高亦可安裝數片RTX GPU顯卡。散熱方面標配1顆風流量59CFM之120mmx25mm靜音風扇, 或者可選購安裝風流量155CFM之120mmx38mm雙滾珠散熱風扇。標準存儲環境可安裝3組可90度旋轉5.25吋ODD以及2組2.5吋U.2 SSD, 亦可選購安裝多款熱插拔抽取盒。標準ATX主機板以及PS2 single或者redundant power supply皆可安裝, 歡迎各界經銷代理。


Specification

- * 共計5組存儲空間: 3組可90度旋轉5.25吋ODD, 2組2.5吋SSD或者U.2 SSD
- * 板金主要架構採用1.0mm厚度SGCC超高強度無花鋼板
- * 前面板標配免工具即可拆換式濾網罩, 有效降低灰塵進入系統內部
- * 前面板標配1組內吸式120mmx25mm靜音風扇 (風扇料號D12SM-12, 風流量59CFM)
- * 前面板標配2組USB 3.0, 亦可同時相容USB 2.0版本
- * 機殼內部標配介面卡減震壓條, 短/中/長固定卡筍可上下固定並調整全高/全長介面卡位置
- * 支援7 slot全高Full-Size介面卡, 最深可支援至360.00mm (如安裝120mmx25mm風扇)
- * 支援7 slot全高Full-Size介面卡, 最深可支援至340.00mm (如安裝120mmx38mm風扇)
- * 支援主機板: ATX(12"x9.6"), MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * 支援DeskTop桌上型, MiniTower直立式, 以及Wallmount壁掛式的環境皆適用
- * 支援壁掛式支架 (選配, 料號ATX-100B-WALL-BK, 每單位為雙)
- * 支援標準8cm與12cm~14cm風扇版本之PS2 PS或PS2 Mini RPS (可支援最深電源200mm)
- * 標準烤漆顏色: 高強度耐刮傷黑色纖維烤漆或者高強度耐刮傷RAL 9018電腦白色纖維烤漆
- * 台灣工控全球品質保固三年(含所有電子零組件)
- * 機型外型尺寸: D.410 x W.330 x H.196 /mm
- * 零件包明細: #6及M3螺絲共計60顆, #6主機板銅柱x10根, 短/中/長固定卡筍共計7支
- * 包裝明細: NW 6.77KG, GW 7.96KG, 2.70 CUFT (carton size at 53.5x44.5x32cm)



Ordering Information

- 機種型號: ATX-100B, Black ATX desktop-minitower-wallmount chassis (如白色則型號為ATX-100)
- 選配A: SUNTAI12038, Suntain 120mm x 38mm two-ball bearing fan (CFM 155.34, Air pressure 16.23mm H2O)
- 選配B: ATX-100B-WALL-BK, 黑色壁掛式支架 (如白色則料號為ATX-100-WALL-BK, 每單位為雙, 厚度1.6mm, 每雙淨重0.56KG)
- 選配C-1: 支援標準8cm與12cm~14cm風扇版本之PS2 power supply (可支援電源深度140mm~200mm)
- 選配C-2: 支援添誠R4S系列400W/500W PS2 Mini Redundant power supply (電源深度174mm)
- 選配C-3: 支援新巨MRT與MRW系列300W~600W PS2 Mini Redundant power supply (電源深度185mm)
- 選配C-4: 支援添誠R4B系列600W/700W/800W PS2 Mini Redundant power supply (電源深度199mm)
- 選配C-5: 支援新巨MRG系列500W~800W PS2 Mini Redundant power supply (電源深度200mm)
- 選配D-1: 25-35-BK, 1組5.25吋空間轉1顆3.5吋支架, 或者亦可1組3.5吋空間轉2顆2.5吋支架
- 選配D-2: RW135-12G, 1組5.25吋空間轉1顆3.5吋熱插拔抽取盒SATA/SAS 12G
- 選配D-3: TL135-12G, 1組5.25吋空間轉1顆3.5吋TrayLess熱插拔抽取盒SATA/SAS 12G
- 選配D-4: RW225-NVMe-U, 1組5.25吋空間轉2組USB 3.0及2顆2.5吋插拔抽取盒U.2 NVMe 32G
- 選配D-5: RW225-NVMe, 1組5.25吋空間轉2顆2.5吋插拔抽取盒U.2 NVMe 32G
- 選配D-6: RW225-12G, 1組5.25吋空間轉2顆2.5吋熱插拔抽取盒SATA/SAS 12G
- 選配D-7: RW625-12G, 1組5.25吋空間轉6顆2.5吋熱插拔抽取盒SATA/SAS 12G
- 選配D-8: RW825-1525, 1組5.25吋空間轉8顆2.5吋熱插拔抽取盒SATA/SAS 6G
- 選配D-9: RW425-NVMe, 1組5.25吋空間轉4顆2.5吋插拔抽取盒U.2 NVMe 32G
- 選配D-10: RW425-12G-MS, 1組5.25吋空間轉4顆2.5吋熱插拔抽取盒SFF-8643 12G
- 選配D-11: RW425-12G, 1組5.25吋空間轉4顆2.5吋熱插拔抽取盒SATA/SAS 12G
- 選配D-12: RW425, 1組5.25吋空間轉4顆2.5吋熱插拔抽取盒SATA/SAS 6G
- 選配E-1: 2525T03HDBK, 2組5.25吋空間轉3顆3.5吋支架
- 選配E-2: RW335-12G, 2組5.25吋空間轉3顆3.5吋熱插拔抽取盒SATA/SAS 12G
- 選配E-3: TL335-12G, 2組5.25吋空間轉3顆3.5吋TrayLess熱插拔抽取盒SATA/SAS 12G
- 選配F-1: 3525T05HDBK, 3組5.25吋空間轉5顆3.5吋支架
- 選配F-2: RW435-12G-MS, 3組5.25吋空間轉4顆3.5吋熱插拔抽取盒SFF-8643 12G
- 選配F-3: RW435-12G, 3組5.25吋空間轉4顆3.5吋熱插拔抽取盒SATA/SAS 12G
- 選配F-4: TL435-12G-MS, 3組5.25吋空間轉4顆3.5吋TrayLess熱插拔抽取盒SFF-8643 12G
- 選配F-5: TL435-12G, 3組5.25吋空間轉4顆3.5吋TrayLess熱插拔抽取盒SATA/SAS 12G
- 選配F-6: RW535-12G, 3組5.25吋空間轉5顆3.5吋熱插拔抽取盒SATA/SAS 12G
- 選配F-7: TL535-12G, 3組5.25吋空間轉5顆3.5吋TrayLess熱插拔抽取盒SATA/SAS 12G
- 選配G-1: 1MSAS-4SATA-500MM, SFF-8087 Mini-SAS (Host) to Four SATA (Device) cable
- 選配G-2: SFF-8643-500MM, SFF-8643 Mini-SAS HD (Host) to SFF-8643 Mini-SAS HD (Device) cable
- 選配G-3: 4SATA-SFF-8643-500MM, Four SATA (Host) to SFF-8643 Mini-SAS HD (Device) cable
- 選配G-4: SFF-8643-4SATA-500MM, SFF-8643 Mini-SAS HD (Host) to Four SATA (Device) cable
- 選配H-1: 2U2011A-8080, 2U Intel LGA2011 LGA2066 active CPU cooler Square (2U 3U 4U chassis compatible)
- 選配H-2: 2U2011A-5694, 2U Intel LGA2011 active CPU cooler Narrow (2U 3U 4U chassis compatible)
- 選配H-3: 2U115XA, 2U Intel LGA115x Xeon 1230 active CPU cooler (2U 3U 4U chassis compatible)
- 選配H-4: 2U4094A-SP3, 2U AMD EPYC LGA4094 active CPU cooler SP3 (2U 3U 4U chassis compatible)
- 選配H-5: 2U1718A-AM5, 2U AMD AM4 AM5 active CPU cooler (2U 3U 4U chassis compatible)
- 選配H-6: 2U3647A-S82, 2U Intel LGA3647 active CPU cooler Square (2U 3U 4U chassis compatible)
- 選配H-7: 2U3647A-R82-1, 2U Intel LGA3647 active CPU cooler Narrow (2U 3U 4U chassis compatible)
- 選配H-8: 2U4189A-M82, 2U Intel LGA4189 active CPU cooler (2U 3U 4U chassis compatible)
- 選配H-9: 2U1700A-V15, 2U Intel LGA1700 active CPU cooler (2U 3U 4U chassis compatible)

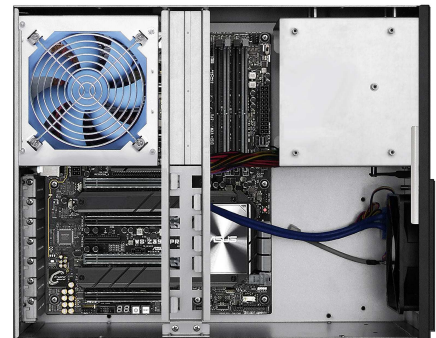

最新更新日期: 2024年01月23日

當社の書面許可しない場合に勝手に製品の設計、写真、規格説明など使っては禁止されております。法律顧問: Guan-Rong Attorney-AT-LAW

GeneSys Group Corporation copyright reserved © Without official document authorized by our company, any commercial behaviors including product design, photograph and specification description are prohibited. Website: www.genesysgroup.com.tw