


Multi-core processor era has been the main stream nowadays, the major features of this 2U C236B chassis are the I/O front-access and front low profile slots design, chassis depth is merely 360mm, and allow maximum five 2.5" SSD or HDD at 7mm~12.5mm height, also it's compliant with the latest 12G SFF-8639 2.5" SAS SSD interface. The motherboard form factors are compatible with MicroATX 9.6"x9.6" or Mini-ITX 6.7"x6.7". Cooling solution for two 80mmx25mm exhaust silent fans at rear panel, the front bezel also equipped with two USB 3.0 ports as standard, welcome customers distribution all over the world.

Specification

- * Drive capacity: two 3.5" HDD & one 2.5" SSD (7mm~9.5mm height compatible)
- * or five 2.5" SSD (one 15mm & four 12.5mm high supported, option 25-35-BK x2 required)
- * Drive bay equipped with anti-vibration function, extend storage appliance life
- * Durable strength aluminum alloy die-casting handles
- * Two USB 3.0 ports at front bezel as standard (USB 2.0 also compatible)
- * Two 80mmx25mm exhaust silent fans at rear panel (fan part# D80SM-12)
- * Equipped with two channels 1000base T RJ45 LAN ports at rear panel as standard
- * Compatible motherboard: MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * Support standard 8cm fan version PS2 power supply (max. psu depth at 140mm)
- * Support 4 slot low profile plugin cards (max. depth 270mm)
- * The main sheet metal constructed by 1.2mm~2.0mm SGCC mechanism
- * Standard paint: scratch-resistant Black textured, no paint at rear panel
- * Genesys Group server chassis including fan & electronics in global 3 years warranty
- * Chassis dimension: 19" x 2U x 360mm (14.17" deep)
- * Accessory pack: M3 truss x20, #6 round x20, M6 to #6 x 3.5mm high stand-off x8
- * Package: NW 5.6 KGM, GW 6.1 KGM, 1.65 CUFT (56x49x17cm, single box packed)

Ordering Information

- Model#: C236B 2U black MicroATX front-access chassis
- Option A: Standard 8cm fan version PS2 power supply (max. psu depth at 140mm)
 - Option B: 25-35-BK 5.25" 3.5" 2.5" multiple HDD bracket (install 2 pairs can load totally five 2.5" SSD/HDD in a row)
 - Option C-1: NJ-600 600mm 2-layer 3-travel universal slide rail (1 pair, cabinet internal depth 600~1200mm compliant)
 - Option C-2: NJ-2020-18 18-inch full extension slide rail (cabinet internal depth 456.7mm~810mm compliant)
 - Option C-3: 1234U-RMK 1234U rear mounting kit (part# is 1 pair)
 - Option D-1: 2U2011A-8080 2U Intel LGA2011 LGA2066 active CPU cooler Square (2U 3U 4U chassis compatible)
 - Option D-2: 2U2011A-5694 2U Intel LGA2011 active CPU cooler Narrow (2U 3U 4U chassis compatible)
 - Option D-3: 2U1150A 2U Intel LGA115x Xeon 1230 active CPU cooler (2U 3U 4U chassis compatible)
 - Option D-4: 2U4094A 2U AMD EPYC SP3 LGA4094 active CPU cooler (2U 3U 4U chassis compatible)
 - Option D-5: 2U3647A-S82 2U Intel LGA3647 active CPU cooler Square (2U 3U 4U chassis compatible)
 - Option D-6: 2U3647A-R82-1 2U Intel LGA3647 active CPU cooler Narrow (2U 3U 4U chassis compatible)

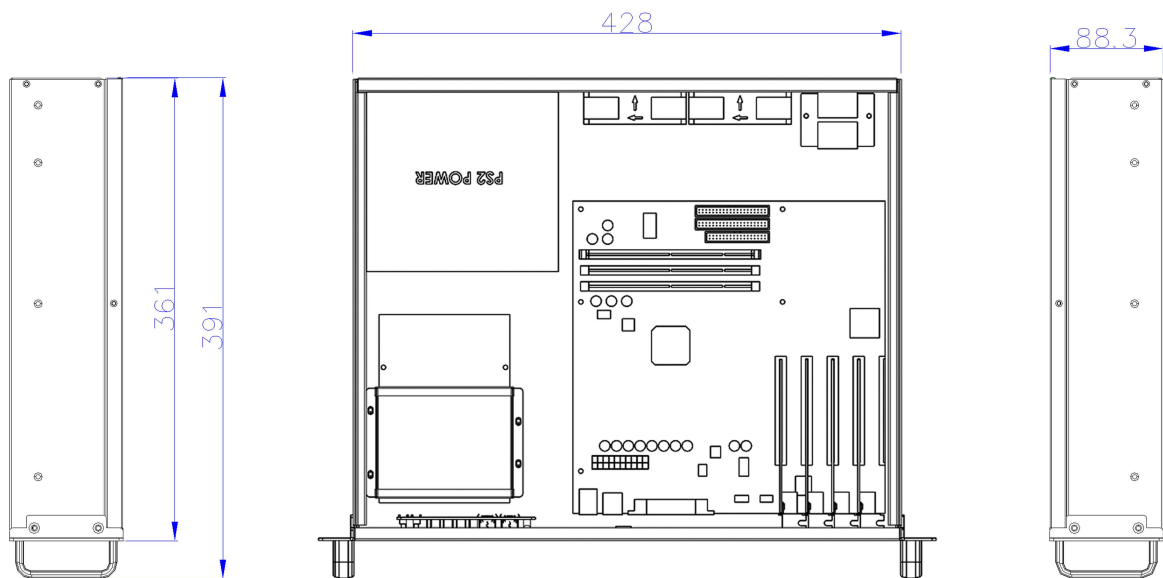

Latest updated on June 01, 2020