

3U E365B is the newest design to meet Intel Socket2011 12"x13" MB mounting holes and smaller size than EEB 3.61 eATX 12"x13" motherboard is also compatible at the same time.

It can install not only regular PS2 power supply but also most PS2 Mini-Redundant power supply in the market as well, and can be precisely mounted both front and rear side of power supply with chassis.

Drive capacity can support 6xODD (max. 220mm deep 5.25" devices), and 2x3.5" and 2x2.5" HDD, and one further 3.5" FDD housing for optional 2.5" or 3.5" hotswap mobile rack module as OS drives.

All sheet metal mechanism use high-class SECC 1.2mm~2.0mm thickness metal that makes sure the whole chassis to be durable, all items provide global 3 years warranty, welcome distribution world wide.



Specification

- * 11 Drive Capacity: 6x5.25" ODD, 2x3.5" HDD, 2x2.5" HDD, 1x3.5" FDD
- * Drive bay supported with anti-vibration function that HDD life time extended
- * Removable front door with security butterfly keylock and air filter function
- * Equipped two USB 2.0 ports behind the front bezel
- * Equipped with strong aluminum die-casting handles
- * Equipped with high-class SECC sheet metal 1.2mm~2.0mm
- * Two quick-assembly Sunon EEC0251B1-000C-G99 120mmx25mm fans in the middle
- * Room noise without fan activated is 41dBA, tested by 10cm distance to the running fan is 70dBA (including room noise)
- * MB: eATX EEB3.61(12"x13")·ATX(12"x9.6")·MicroATX(9.6"x9.6")·Mini-ITX(6.7"x6.7")
- * support PS2 8cm or 12cm~14cm fan version or Mini-RPS (max. psu depth at 200mm)
- * support 4 slot full high expansion cards (max. depth at 342mm)
- * standard paint: black
- * Genesys Group branded server chassis model (with build-in fans) global 3 years warranty
- * chassis dimension: 19" x 3U x 650mm (25.59" deep)
- * package: NW 11 KGM, GW 13.50 KGM, 3.50 CUFT (57x79x22cm, single box packed)

Ordering Information

Model# : E365B 3U black eATX enterprise server chassis

- Option 1-0 : PS2 8cm or 12cm~14cm fan version power supply (max. psu depth at 200mm)
- Option 1-1 : SureStar R4B series 400W/500W/600W/700W/800W PS2 Mini Redundant power supply (199mm deep)
- Option 1-2 : Etasis EFRP-2462 460W PS2 Mini Redundant power supply (190mm deep)
- Option 1-3 : Zippy MRT & MRW & MRG series 300W~800W PS2 Mini Redundant power supply (185mm~200mm deep)
- Option 1-4 : Enhance ENR0500 series 400W or 500W or 600W PS2 Mini Redundant power supply (185mm deep)
- Option 2-0 : NJ-600, 600mm 2-layer 3-travel universal slide rail , full travel extension up to 1100mm deep (part# is 1 pair)
- Option 2-1 : 1234U-RMK, 1234U rear mounting kit (part# is 1 pair)
- Option 3-0 : SUNON6025, exhaust 60mm x 25mm fan installed above I/O shield of rear panel (part# is 1pcs)
- Option 4-0 : TL225, 1x3.5" FDD space to 2x2.5" TrayLess Hot-Swap Cage
- Option 5-0 : 25-35-BK, 5.25" 3.5" 2.5" multiple HDD bracket
- Option 6-0 : 2525TO3HDBK, 2x5.25" ODD space to 3x3.5" bracket
- Option 6-1 : 3525TO5HDBK, 3x5.25" ODD space to 5x3.5" bracket
- Option 6-2 : RW425, 1x5.25" to 4x2.5" SAS/SATA Hot-Swap Cage
- Option 6-3 : RW825, 2x5.25" to 8x2.5" SAS/SATA Hot-Swap Cage
- Option 6-4 : RW1225, 3x5.25" to 12x2.5" SAS/SATA Hot-Swap Cage
- Option 6-5 : RW335, 2x5.25" to 3x3.5" SAS/SATA Hot-Swap Cage
- Option 6-6 : RW435, 3x5.25" to 4x3.5" SAS/SATA Hot-Swap Cage
- Option 6-7 : RW535, 3x5.25" to 5x3.5" SAS/SATA Hot-Swap Cage
- Option 6-8 : TL335, 2x5.25" to 3x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Option 6-9 : TL435, 3x5.25" to 4x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Option 6-10 : TL535, 3x5.25" to 5x3.5" TrayLess SAS/SATA Hot-Swap Cage
- Option 6-11 : TL135, 1x5.25" to 1x3.5" TrayLess SAS/SATA Hot-Swap Cage

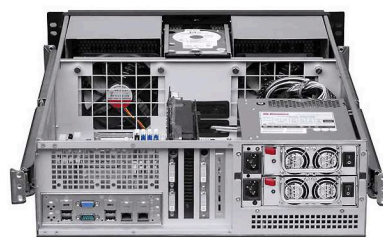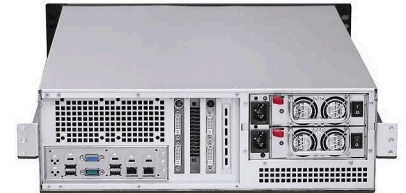

Last updated on April 28, 2014