




修訂 REVISIONS		日期 DATE
版次 REV.	記號 DESCRIPTION	

出圖章
 MAR-26-2010
研發本部

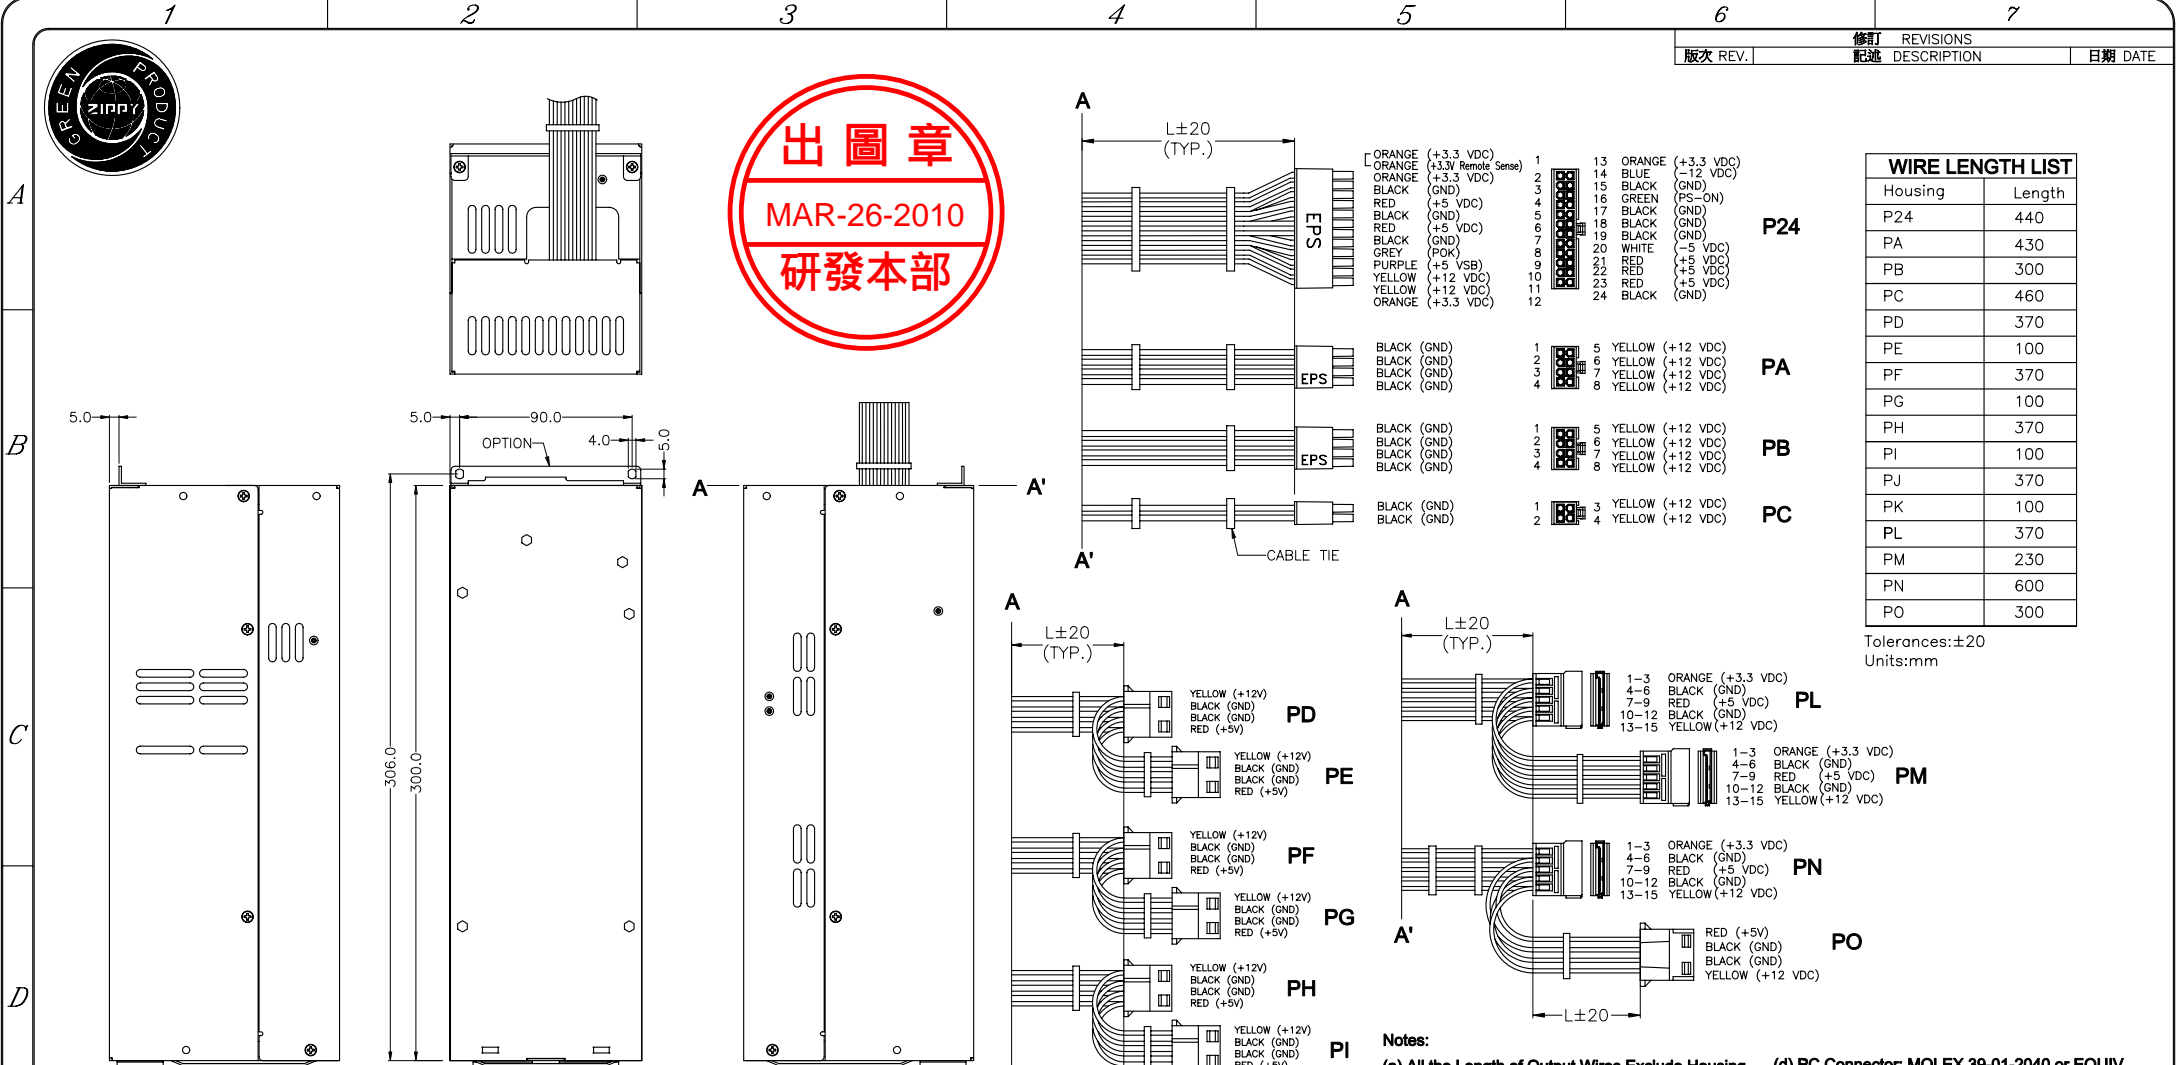

WIRE LENGTH LIST	
Housing	Length
P24	440
PA	430
PB	300
PC	460
PD	370
PE	100
PF	370
PG	100
PH	370
PI	100
PJ	370
PK	100
PL	370
PM	230
PN	600
PO	300

Tolerances: ±20 Units:mm

- Notes:**
 (a) All the Length of Output Wires Exclude Housing. (d) PC Connector: MOLEX 39-01-2040 or EQUIV. Terminal: MOLEX 39-00-0059 or EQUIV.
 (b) P24 Connector: MOLEX 39-01-2240 or EQUIV. Terminal: MOLEX 39-00-0059 or EQUIV. (e) PD~PK, PO Connector: AMP 1-480424-0 or EQUIV. Terminal: AMP 61117-4 or EQUIV.
 (c) PA, PB Connector: MOLEX 39-01-2080 or EQUIV. Terminal: MOLEX 39-00-0059 or EQUIV. (f) PL~PN Connector: MOLEX 675820000 or EQUIV. Terminal: MOLEX 675810000 or EQUIV.

容許公差: TOLERANCES:	.XXX ±.025 .XX ±.100 .X ±.250
投影法: PROJECTION:	第三角法

材料規格: MATERIAL:	
核准者: APPROVE BY:	黃永欣
日期: DATE:	MAR-25-2010
審核者: CHECK BY:	李宗翰
日期: DATE:	MAR-25-2010
繪圖者: DRAW BY:	詹德宜
日期: DATE:	MAR-25-2010

新巨企業股份有限公司 ZIPPY TECHNOLOGY CORP. POWER DIVISION	
品名: MODEL NO:	P3M-9950P
料號: PART NO:	B001540007
圖號: DRAW NO:	B001540007
槽號: FILE NO:	B001540007
單位: UNITS:	mm
版次: REV. NO:	B1
規格: SPEC:	A0
編號: SHEET:	0F